


240X64 DOTS

4-∅3.5

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
FG	VSS	VDD	VO	/WR	/RD	/CE	C/D	NC	/RST	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	FS	NC

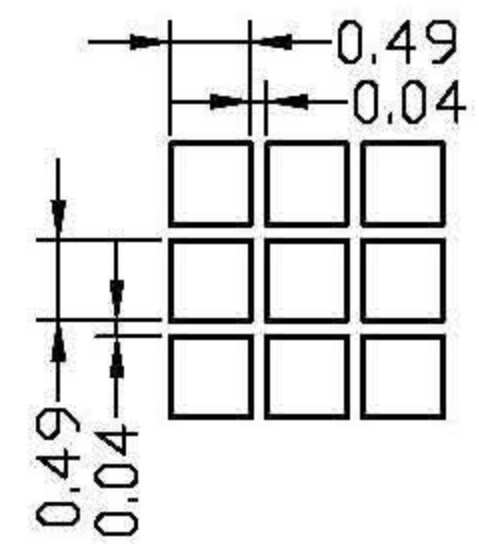

- NOTES:
- 1.DISPLAY TYPE: STN
 - 2.VIEWING DIRECTION: 6:00
 - 3.POLARIZER MODE: TRANSFLECTIVE/POSITIVE
 - 4.OPERATING TEMP: -20°C---+70°C
 - 5.STORAGE TEMP: -30°C---+90°C
 - 6.LCD OPERATING VOLTAGE:-----
 - 7.DRIVE METHOD: 1/64DUTY 1/9BIAS
 - 8.CONTROLLER: T6963C
 - 9.BACKLIGHT: LED(YELLOW -GREEN,4.2DCV)
 - 10.ALL UNMARKED TOLERANCES:±0.3mm
 - 11.BEZEL(THICKNESS:0.6mm) IS TO BE PAINTED BLACK

北京思普瑞特科技发展有限公司					
绘图:		型号:	24064A	单位:	mm
审核:		版本号:	0	电话:	010-51661178
批准:		日期:		传真:	010-62988681