

CON1

1	VSS	11	D2
2	VDD	12	D3
3	VO	13	D4
4	/WR	14	D5
5	/RD	15	D6
6	/CS	16	D7
7	A0	17	NC
8	RST	18	VOUT
9	DO	19	NC
10	D1	20	NC

CON2


CON2

1	2	3	4	5
VFL1	NC	NC	NC	VFL2

NOTES:

- |                             |                       |
|-----------------------------|-----------------------|
| 1.DISPLAY TYPE:             | STN/BLUE              |
| 2.VIEWING DIRECTION:        | 6:00                  |
| 3.POLARIZER MODE:           | TRANSMISSIVE/NEGATIVE |
| 4.OPERATING TEMP:           | 0C---+50°C            |
| 5.STORAGE TEMP:             | -10C---+60°C          |
| 6.VDD:                      | +5V                   |
| 7.DRIVE METHOD:             | 1/240DUTY 1/17BIAS    |
| 8.CONTROLLER:               | SED1335FOA            |
| 9.BACKLIGHT:                | CCFL(WHITE)           |
| 10.ALL UNMARKED TOLERANCES: | ±0.3mm                |

北京思普瑞特科技发展有限公司

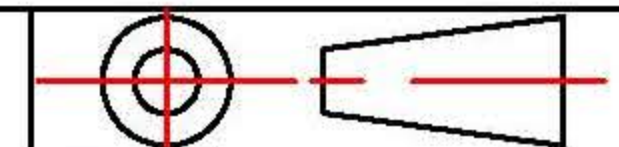

绘图:	型号:	MS320240B-1(带1335)	单位:	mm
审核:	版本号:	0	电话:	010-51661178
批准:	版本号:		传真:	总机转 190